


770nm Laser Diode





770nm Laser Diode

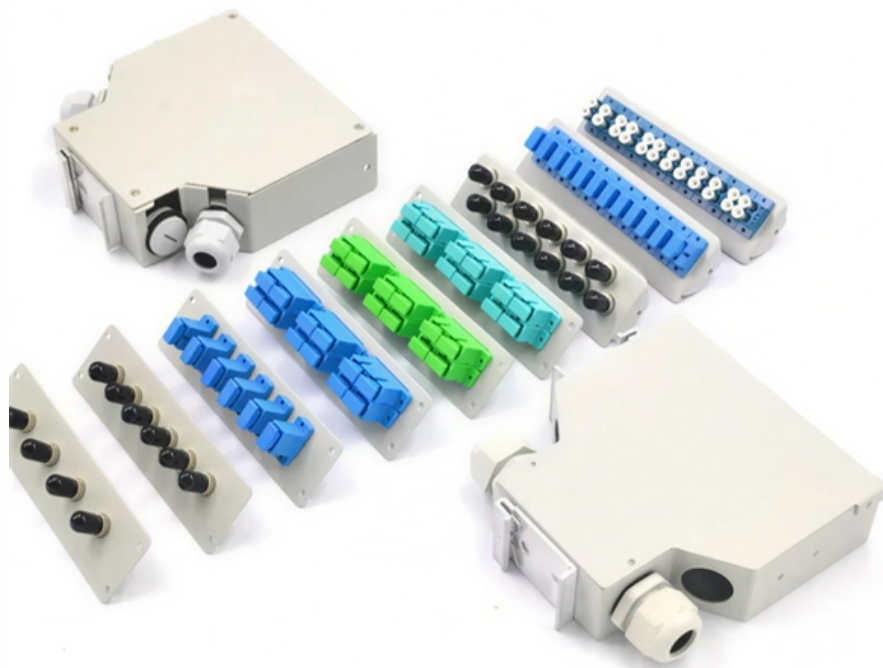

FWSL-770-5W-C-MM

Laser Type: CW-Laser-Diodes Continuous-wave (CW) laser diodes excel in telecommunications, medical applications, industrial processing, and scientific research due to their ability to produce a


Diode Laser, 770nm

In addition to high power, this 770nm and 840nm laser diode product features a low operating current. Key applications are listed as SS Laser excitation as well as



Fiber coupled laser diode 3W @ 770nm

QPhotonics offers a wide range of high brightness pigtailed laser diodes with power from 150mW to 5W in 660-1800nm wavelength range. They come in three configurations: HHL package, 14pin butterfly

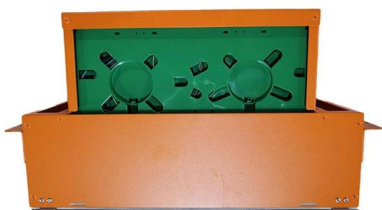

770nm, 840nm, Semiconductor Laser Diode, 90mW, TO

Diode Lasers, 770nm, 840nm, 90mW, TO-can, Sony, Unbiased Selection Guide, ALL BRANDS, 370nm to 15000nm, Compare and Select the Best



770nm single frequency Narrow Linewidth Laser Diode

770nm single frequency Narrow Linewidth Laser Diode Description: The PL-NL series Fiber Bragg Grating laser is single frequency laser diode module designed for optical measurement and



770nm 760nm 2W LD (Laser Diode)

Wavespectrum offer 760nm~770nm 2W High Power Laser Diode with TO3 Package



Length:33.5mm
Small-end inner diameter:4.0mm
Large-end inner diameter:6.0mm



FWSL-770-5W-C-MM

Continuous-wave (CW) laser diodes excel in telecommunications, medical applications, industrial processing, and scientific research due to their ability to produce a continuous, stable laser beam,



770nm PM Narrow Linewidth Laser Diodes- LD-PD PTE. LTD.

The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). The Single-Frequency Continuous Tuning Range > 1.2 nm by adjust the Mini PZT Built



770 nm Laser Diode , PH770DBR Series

770 nm Laser Diode , PH770DBR Series
PH770DBR Series High-Power Single-Frequency Laser Diode

PH770DBR

This monolithic laser diode incorporates a distributed Bragg reflector (DBR) for stable frequency performance over its life time. It provides a diffraction limited, single lateral and longitudinal mode



FWSL-770-5W-C-MM

The FWSL-770-5W-C-MM from Frankfurt Laser Company is a Laser Diode with Wavelength 770 nm, Output Power 5 W, Output Power 5 W, Threshold Current 1.2 A, Operating Current 5.5 A.



Diode Laser, 770nm

Laser Diode from Sony has a specified optical output power of 180mW CW. The attached data sheet refers to benefits and features which include this as a gain




770nm 760nm 2W LD (Laser Diode)

770nm Laser Diodes 770nm High Power Laser Diodes 770nm 2W Output Power TO3 Package Long Lifetime

Fiber Coupled Diode Module with 14-Pin Butterfly (BTF) Package

Wavespectrum offer the Fiber coupled diode laser module with 14-pin butterfly (BTF) package, pigtailed laser module with TEC cooler, high stability, long lifetime.

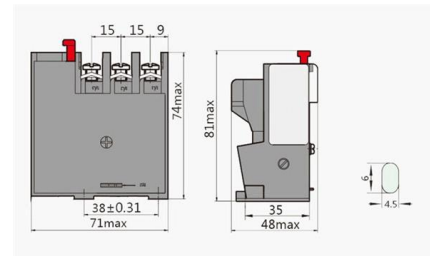



770nm Single frequency FBG stabilized Tunable Narrow Linewidth Laser Diodes

770nm Single frequency FBG stabilized Tunable Narrow Linewidth Laser Diodes Description: The PL-NL series Fiber Bragg Grating laser is single frequency laser diode module designed for optical

CS-Mount 750-770 nm



The CS-Mount 750-770 nm from Monocrom is a Laser Diode that operates at a wavelength of 750 nm - 770 nm. It delivers an output power of up to 40 W (CW) & 200 W (QCW) and has a wavelength

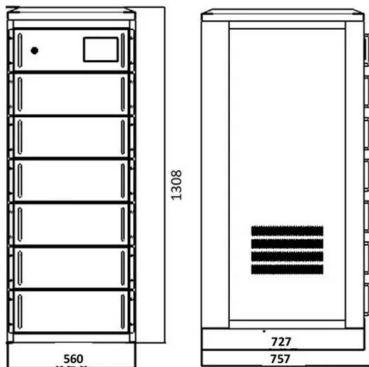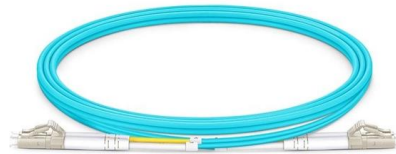

770nm Single frequency FBG stabilized Tunable Narrow Linewidth

770nm Single frequency FBG stabilized Tunable Narrow Linewidth Laser Diodes Description: The PL-NL series Fiber Bragg Grating laser is single frequency laser diode module designed for optical

770 nm Diode, Innolume

Tailored 770 nm Diode engineered for your needs. Narrow linewidth, high stability, and full in-house production ensure top performance and flexibility.




C-Stack 750-770 nm

The C-Stack 750-770 nm from Monocrom is a Laser Diode with Wavelength 750 to 770 nm, Output Power Up to 200 W, Output Power Up to 200 W, Output Power (CW) Up to 200 W, Operating



770nm single frequency Narrow Linewidth Laser Diode

The PL-NL series Fiber Bragg Grating laser is single frequency laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with



1000-1100nm DBR Laser Diode

1000-1100nm DBR Laser Diode, Ideal Photonics Specializing in global instrument distribution and system integration for MCT detectors, semiconductor laser diodes, mid-infrared QCL lasers, fiber amplifiers,

770nm Laser Diodes (high power LD)

Wavespectrum offer 760nm~770nm high power laser diode, 2W output power, C-mount/TO3 Package, FAC optional.



PH770DBR Series High-Power 770 nm Laser Diode , PH770DBR

Description The PH770DBR Series of high-power edge-emitting lasers are based on Photodigm's advanced single-frequency laser technology. It provides a diffraction limited, single lateral and



PH1064DBR-2-BF

Description The PH770DBR Series of high-power edge-emitting lasers are based on Photodigm's advanced single-frequency laser technology. It provides a diffraction limited, single lateral and



Fiber coupled laser diode 3W @ 770nm

This package design features the smallest footprint and high output power. This results in a high packing density which allows for an extremely compact system design. The highly thermal-conductive base

Contact Us

For datasheets, pricing, or custom high-speed optical interconnect solutions, please visit:
<https://syropy.com.pl>